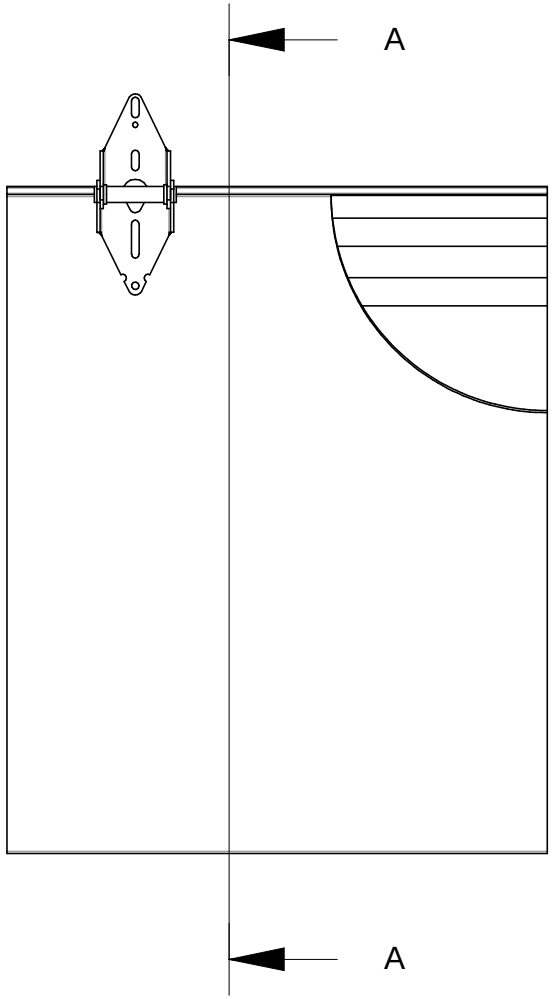



Roll-formed architectural detail

Polyurethane filled panels
- High insulation (4.8 r-value)
- CFC free
- Acoustic rating (STC) 25.1
- Fire properties-early fire hazard tested to AS 1530 part3, 1999
- 10 year skin separation warranty
- Two coat polyester paint system
- Thermal break

Interlocking panel joins

SECTION A-A

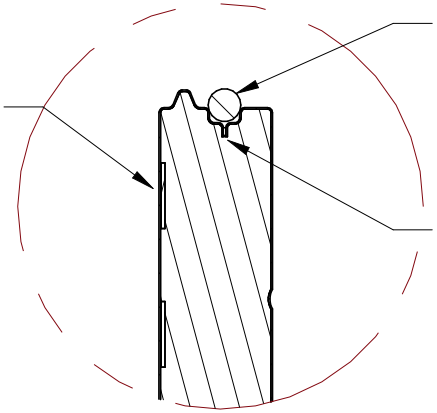

DETAIL A

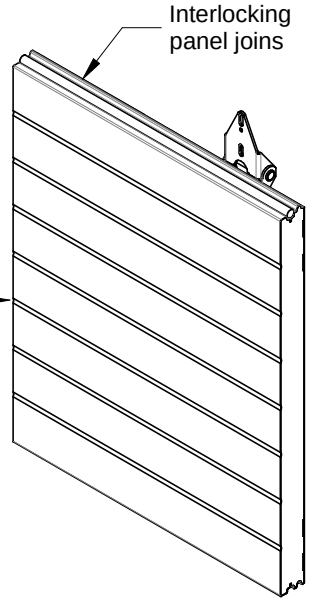

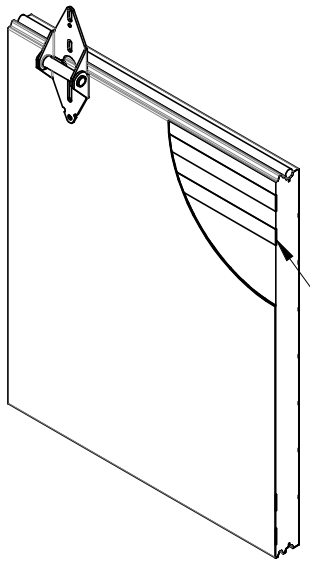

Drawn by	Checked by	Approved by	Date	Scale
ANDY BRYANT	-	-	05-Aug-2010	NTS - A4 L

THIS DRAWING IS INTELLECTUAL PROPERTY OF:

TRU-BILT INDUSTRIES

586 KAIKORAI VALLEY RD, DUNEDIN, NEW ZEALAND

All product designs are subject to copyright and cannot be copied in whole or part.

PANEL SECTION & DETAIL

TRU-THERM

Edition	Sheet
1.0	-